Multi-lamp, solid state light engine, recessed linear wall grazer with flangless housing, nominal 4" (100mm) wide aperture, parabolic baffle and regressed acrylic lens.

TYPE:		
JOB:		
SPECIFIER:		

SPECIFICATIONS

HOUSING - Precision die-formed heavy gauge aluminum with welded end plates and ultrim plaster frame.

MOUNTING - Recessed in sheetrock ceiling. **ELECTRICAL -** Integral multi LED driver. 120-240v current at 50hz or 60hz. Compatible with 0-10V dimming.

LAMP - BridgeLux LED supplied with fixture. See performance information for available Color temperature and CRI. **LABELS -** CSA-C,US, Damp Location,

SOCKET - Ulsocket[™] provides screwless connection between the heat sink and the LED module for future proof maintenance.


LENS - Veiling acrylic lens or frosted Supertex

TRIM - Extruded aluminum side rails with extruded aluminum parabolic baffles.

FINISH - Black powder paint housing. Aperture trim available in black and white as standard. Additional colors and RAL palette available. Consult factory for custom finishes.

APPLICATIONS

Medium aperture wall grazer used in ceiling heights up to 30' (10M) to highlight the texture in surfaces such as stucco or brick, illuminate flat surfaces such as venetian plaster, fabric or wood, or specular surfaces such as polished stone or stainless steel.

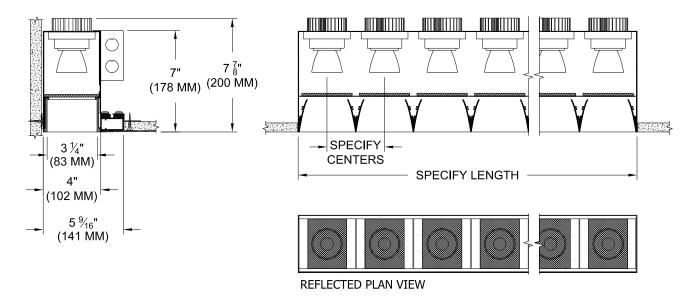

ORDERING INFORMATION

HOUSING	LENGTH	DRIVER	FINISH	APERTURE LENS
811-LEDBPH				
Plaster Flange Housing 8 = 80CRI 27 = 2700K 9 = 97CRI 30 = 3000K 35 = 3500K 40 = 4000K	Specify exact length to nearest 4" (100mm)	UN5 = 120v-277v HE UN7 = 120v-277v HO UN10 = 120v-277v VHO	P14 = White BLK = Black PXX = SLI Color XXXX = RAL # CST = Custom	79A = Veiling Acrylic 82A = Frosted Supertex

This information is provided as a specification aid. A submittal will be prepared by the manufacturer for approval prior to fabricating this product.

CLICK HERE for LED and driver performance information including wattage and lumen output or go to www.specialtylightingindustries.com.

