

Multi-lamp, solid state light engine, surface mounted linear wall grazer with nominal 2" (50mm) wide aperture and regressed acrylic lens. Narrow profile wall grazing downlight used in ceiling heights up to 10 feet (3m) to highlight the texture in surfaces such as stucco or brick, illuminate flat surfaces such as fabric or wood, or specular surfaces such as polished stone or stainless steel.

**JOB:** \_\_\_\_\_

**SPECIFIER:** \_\_\_\_\_

**TYPE:** \_\_\_\_\_

**QUANTITY:** \_\_\_\_\_

**SIGNATURE:** \_\_\_\_\_

## SPECIFICATIONS

### HOUSING

- Extruded aluminum with seamless welded and ground end plates

### MOUNTING

- Surface Mounted

### ELECTRICAL

- Integral dimmable electronic driver with internal short circuit protection.
- 120v-277v primary, compatible with 0-10v dimmers.
- Also available for 120v phase control. Consult factory for other drivers.

### LAMP

- 2 watt LED 2" o.c. supplied with fixture

### SOCKET

- Circuit board mounted to extruded aluminum heatsink
- Inline connectors allow removal and replacement

### LENS

- Acrylic and borosilicate beam shaping lenses available


### TRIM



- Parabolic louver baffle

### FINISH

- Powder paint on all surfaces in black and white as standard
- Additional standard colors, RAL palette, custom finishes available

### LABELS

-  US, US tested to UL standards 1598, Damp location, Wet with ST trim

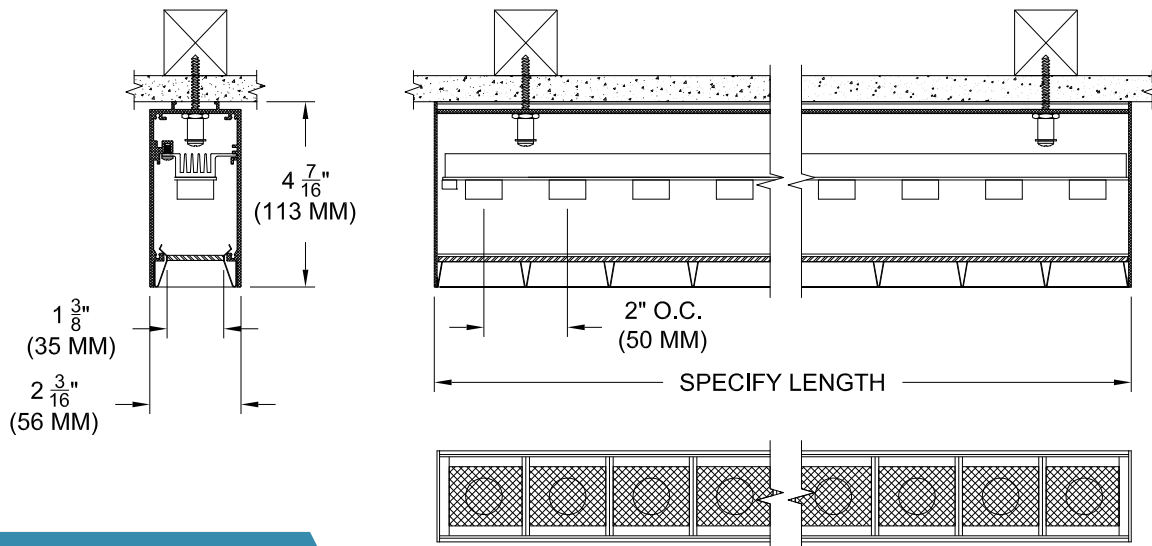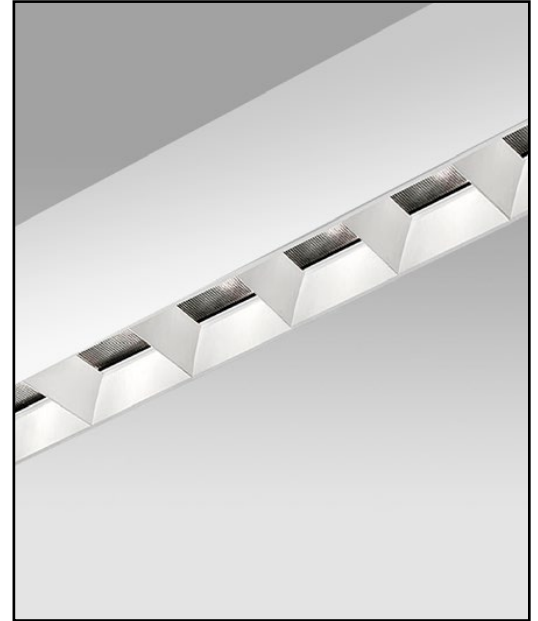

## ORDERING INFORMATION

811-LEDP-SH	LENGTH	DRIVER	HOUSING / LOUVER	APERTURE LENS
Surface Mounted Housing 827 = 2700K 80CRI 830 = 3000K 80CRI 835 = 3500K 80CRI	Specify exact length in increments of 12" (300 mm)  Minimum 24" for integral driver	UN3 = 120v-277v HE 0-10v Dim. UN5 = 120v-277v HO 0-10v Dim. 123LT2 = 120v HE Lutron 2 wire 125LT2 = 120v HO Lutron 2 wire 123LT3 = 120-277v Lutron 3 wire 125LT3 = 120-277v Lutron 3 wire	P14 = White BLK=Black PA=Clear Aluminum PXX = SLI Color CST = Custom	79A = Veiling Acrylic 82A = Frosted Supertex