Multi-lamp, solid state light engine, recessed linear wall grazer with flangless housing, nominal 1.5" (38mm) wide aperture parabolic baffle and regressed acrylic lens.

TYPE:		
JOB:		
SPECIFIER:		

SPECIFICATIONS

HOUSING - Extruded aluminum with seamless welded and ground end plates.

MOUNTING - Surface Mounted Uplight **ELECTRICAL -** Integral dimmable electronic driver with internal short circuit protection. 120v-277v primary, compatible with 0-10v dimmers. Also available for 120v

phase control.

LAMP - 2 watt LED 2" o.c. supplied with fixture.

LABELS - CSA-C, US, Damp Location,

SOCKET - Circuit board mounted to extruded aluminum heatsink. Inline connectors allow removal and replacement.


LENS - Acrylic and borosilicate beam shaping lenses available.

TRIM - Parabolic louver baffle.

FINISH - Powder paint on all surfaces in black and white as standard. Additional colors and RAL palette available. Consult factory for custom finishes.

APPLICATIONS

Narrow profile wall grazer used in low ceiling heights to highlight the texture in surfaces such as stucco or brick, illuminate flat surfaces such as venetian plaster, fabric or wood, or specular surfaces such as polished stone or stainless steel.

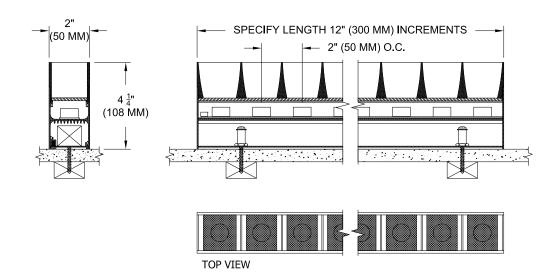

ORDERING INFORMATION

HOUSING	LENGTH	DRIVER	HOUSING/LOUVER*	APERTURE LENS
811-LEDPSHI				
Plaster Flange Housing 827 = 2700K 80CRI 830 = 3000K 80CRI 835 = 3500K 80CRI	Specify exact length in increments of 12", (300 mm)	UN3=120-277v HE (0-10V Dim) 1232W = 120v HE 2 wire Lutron 1333W = 120-277v HE 3 wire Lutron 1555W = 120-277v HE 5% Dim	WHT = White BLK = Black PXX = SLI Color CST = Custom PA = Clear Aluminum ADD MG FOR MARINE GRADE*	79A = Veiling Acrylic 82A = Frosted Supertex 92A = Supertex 91A = Solite

This information is provided as a specification aid. A submittal will be prepared by the manufacturer for approval prior to fabricating this product.

