

Multi-lamp, solid state light engine, recessed linear wall grazer with flangless housing, nominal 4" (100mm) wide aperture, parabolic baffle and regressed acrylic lens. Medium aperture wall grazer used in ceiling heights up to 40' (12M) to highlight the texture in surfaces such as stucco or brick, illuminate flat surfaces such as venetian plaster, fabric or wood, or specular surfaces such as polished stone or stainless steel.

SPECIFICATIONS

HOUSING

- Precision die-formed heavy gauge aluminum

MOUNTING

- Recessed in sheetrock ceiling

ELECTRICAL

- Integral LED driver

LAMP

- Citizen LED supplied with fixture

SOCKET

- Usocket™** allows easy field replacement of light engine

LENS

- Veiling acrylic lens or frosted Supertex


TRIM

- Extruded aluminum side rails with extruded aluminum parabolic baffles

FINISH

- Aperture trim available in black and white as standard
- Additional standard colors, RAL palette, custom finishes available

LABELS

-  , US tested to UL standards 1598, Damp location




JOB: _____

SPECIFIER: _____

TYPE: _____

QUANTITY: _____

SIGNATURE: _____

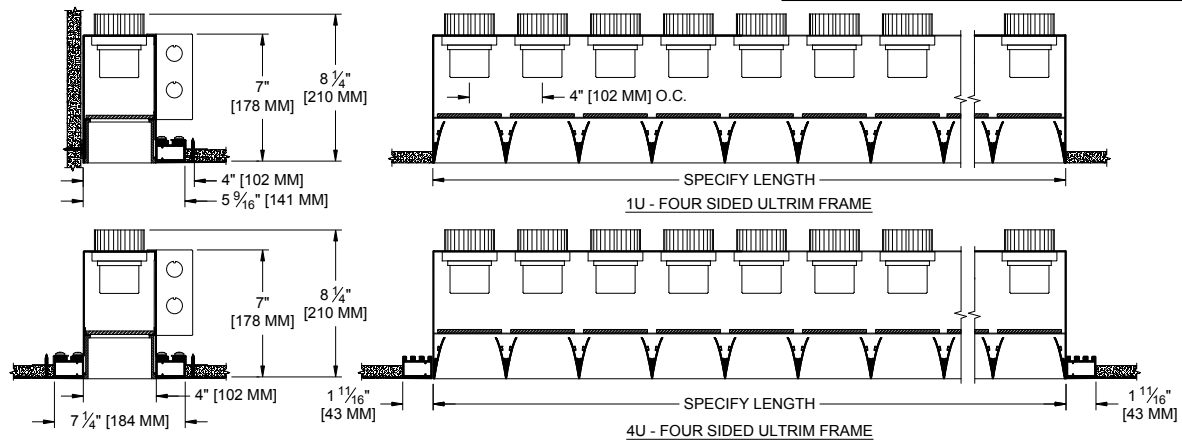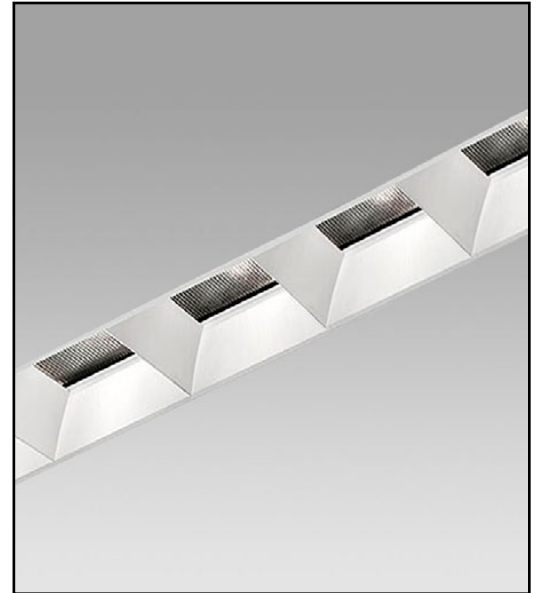

REFLECTED PLAN VIEW

ORDERING INFORMATION

811-LEDZ-PH	LENGTH	LAMP SPACING	SOURCE / DRIVER*	HOUSING / LOUVER	APERTURE LENS	ACCESSORIES
			/	/		
Plaster Housing 9 = 90+CRI	Specify exact length*	4 = 4" 6 = 6" or custom spacing	CZ14 = 120v-277v, 14W 1100lm CZ20 = 120v-277v, 20W 2265lm CZ28 = 120v-277v, 28W 3000lm C1 = 0-10V dimming, 1%, 120-277v C2 = TRIAC/ELV 2-wire, 1% 120v (Lead/Trail Edge) E1 = EldoLED 0-10V Logarithmic Dim, 0.1%, 120-277v E2 = EldoLED DALI, 0.1%, 120-277v E3 = EldoLED 0-10V Linear Dim, 0.1%, 120-277v L2 = Ltrn Hi-lume 1% 2-wr LED driver (120v fwd phase) LTB = Lutron Hi-lume 1% EcoSys LED driver, 1%, 120-277v, Soft-on, Fade-to-Black	WHT = White BLK = Black PA = Clear Aluminum PXX = SLI Color CST = Custom	79A = Veiling Acrylic 82A = Frosted Supertex	1U = 1 Side Ultrim 4U = 4 Side Ultrim
27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K	*Minimum Lamp Spacing 4" O.C.					

*Remote mount may be required

Patent Pending.
These specifications subject to change without notice.

www.specialtylightingindustries.com

1306 Doris Avenue, Ocean, NJ 07712 USA

800.462.7812 732.517.0800 FAX: 732.517.0971

02/19