c	D	\sim	1 =	IC.	۸-	ГI.	\sim	NI	c
•	۳	ι.	11	и.	А	יוו	U	IVI	

HOUSING - Precision die-formed, heavy gauge, CRS. Welded end plates, no visible seam.

ELECTRICAL - CMH, integral electronic ballast, 120/277v.

SOCKET - PAR, medium base, porcelain, 660w, 600v, 4K pulse rated.

MOUNTING - Recessed, for GWB/plaster ceiling.

LABELS - UL, C-UL -Dry Location.

APPLICATIONS

walls and other flat

near the surface to be

illuminated.


TYPE: JOB:

LAMP - PAR 30MH, (spot recommended) - by others.

LENS - Supertex borosilicate glass. Others available consult factory.

HOUSING FINISH - Black powder paint on all recessed surfaces.

BAFFLE FINISH - RAL colors standard, consult factory for custom finishes.

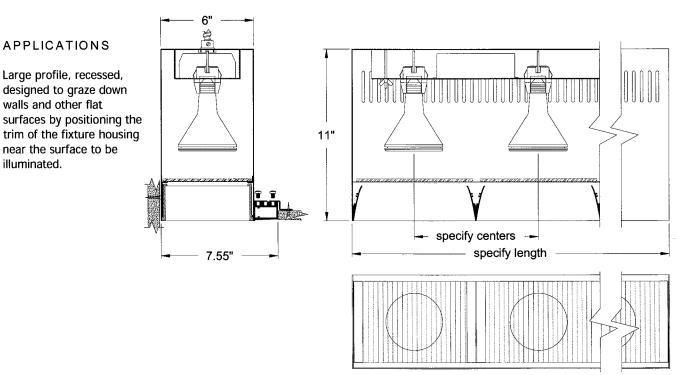

ORDERING INFORMATION

FIXTURE	LAMP CENTERS	LENGTH	BAFFLE FINISH		
#811PAR30 MH PL					
Recessed linear wall grazing system	8 = 8" 12 = 12"	specify exact length	WHT = White BLK = Black XXXX = RAL # CST = Custom (must supply chip)		

