

Multi-lamp, solid state light engine, recessed linear wall grazer with flanged housing, nominal 2" (51mm) wide aperture parabolic baffle and aperture lens. Narrow profile wall grazing downlight used in wall heights up to 12 feet (3.5m) to highlight the texture in surfaces such as stucco or brick, illuminate flat surfaces such as venetian plaster, wood, or specular surfaces such as polished stone or stainless steel.

## SPECIFICATIONS

### HOUSING

- Extruded aluminum housing with integral flange

### MOUNTING

- Recessed in architectural ceiling

### ELECTRICAL

- Integral dimmable electronic driver with internal short circuit protection.
- 120v-277v primary, compatible with 0-10v dimmers.
- Also available for 120v phase control and Lutron

### LAMP

- 2 watt LED supplied with fixture

### SOCKET

- Circuit board mounted to extruded aluminum heatsink
- Inline connectors allow removal and replacement

### LENS

- Acrylic diffusing lens. Others available consult factory

### TRIM

- Parabolic louver baffle



### FINISH

- Housing and louver available in various finishes
- Additional standard colors, RAL palette, custom finishes available

### LABELS

-  , US tested to UL standards 1598, Damp location

JOB: \_\_\_\_\_  
 SPECIFIER: \_\_\_\_\_  
 TYPE: \_\_\_\_\_  
 QUANTITY: \_\_\_\_\_  
 SIGNATURE: \_\_\_\_\_

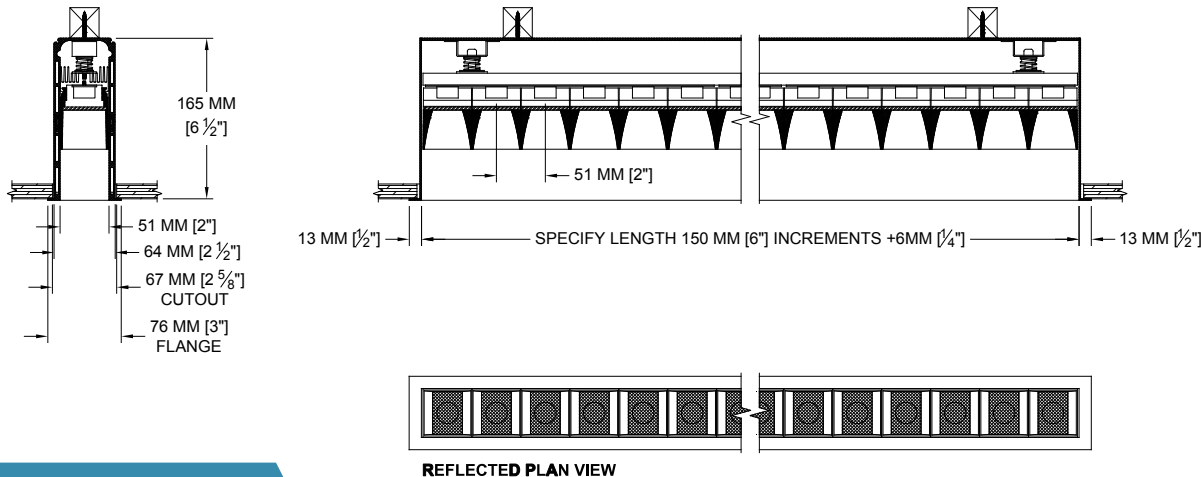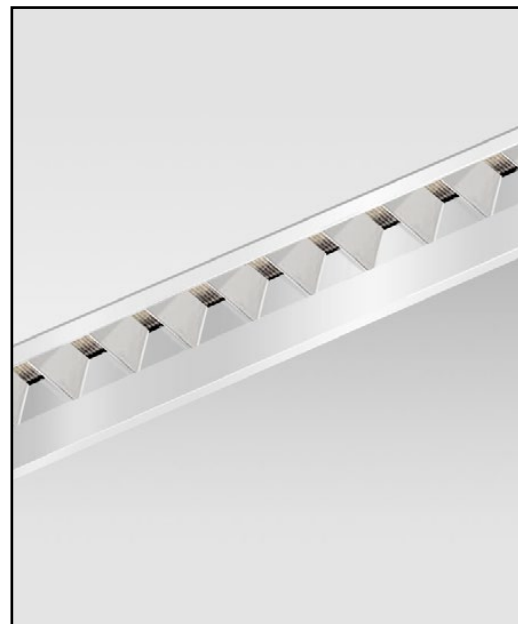

## ORDERING INFORMATION

812-LED-FH	LENGTH	SOURCE / DRIVER	HOUSING / LOUVER	APERTURE LENS
		/	/	
Flanged Housing <b>8</b> = 80 CRI <b>27</b> = 2700K <b>30</b> = 3000K <b>35</b> = 3500K	Specify exact length in increments of 6" (150 mm) Minimum 2' for integral driver	<b>UN3</b> =120v-277v, 0-10v Dim. 9W/ft 600lm/ft (nom.) <b>UN5</b> =120v-277v, 0-10v Dim. 12W/ft 700lm/ft (nom.) *Add <b>L2</b> , <b>LTB</b> for Lutron 2 wire, Lutron Fade-to-Black <b>L2</b> = 120v, Lutron Hi-lume 1% 2-wr LED driver 9W/ft 1100lm/ft (nom.) <b>LTB</b> =120-277v, Fade-to-Black Lutron Hi-lume 1% digital EcoSystem driver 12W/ft 700lm/ft (nom.)	<b>WHT</b> = White <b>BLK</b> =Black <b>PXX</b> = SLI Color <b>CST</b> = Custom	<b>79A</b> = Veiling Acrylic <b>81A</b> = Frosted Solite <b>91A</b> = Solite <b>92A</b> = Supertex