

Multi-lamp LED, surface mounted in slot linear wall grazer.
Socket plate with 10° adjustability.

SPECIFICATIONS

HOUSING

- Precision die-formed heavy gauge aluminum

MOUNTING

- Surface Mounted in slot

ELECTRICAL

- Integral LED driver
- 120-277v current at 50hz or 60hz.
- Compatible with 0-10V dimming, phase dimming of Lutron

LAMP

- LED supplied with fixture

SOCKET

- Circuit board mounted to extruded aluminum heatsink
- Inline connectors allow removal and replacement

LENS

- Veiling acrylic lens or frosted Supertex

TRIM

- Extruded aluminum side rails with extruded aluminum parabolic baffles

FINISH

- Powder paint on all surfaces in black and white as standard
- Additional standard colors, RAL palette, custom finishes available

LABELS

-  , US tested to UL standards 1598, Damp location



JOB: _____

SPECIFIER: _____

TYPE: _____

QUANTITY: _____

SIGNATURE: _____

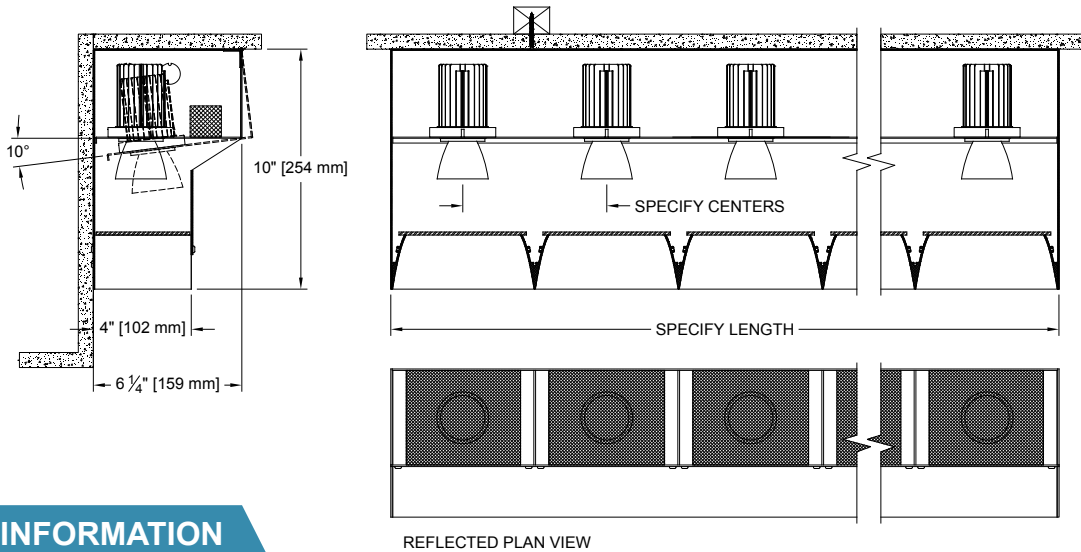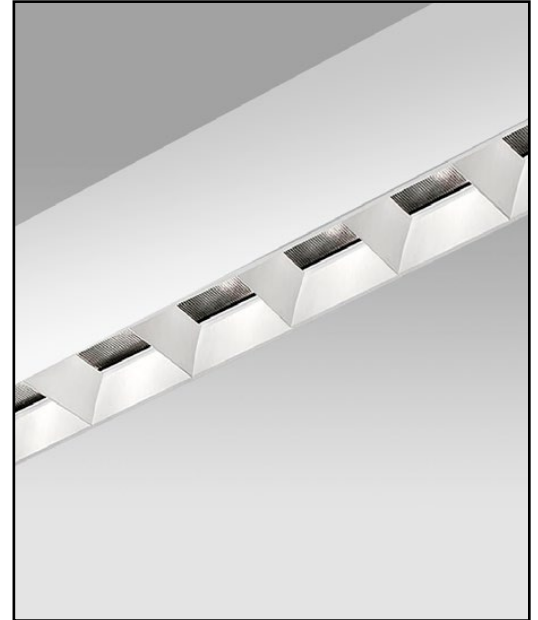

ORDERING INFORMATION

824-LEDZ-SH	LENGTH	SOURCE / DRIVER	LAMP SPACING	HOUSING / LOUVER	APERTURE LENS
		/		/	
Plaster Housing 9 = 90+CRI 27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K	Specify exact length* *Minimum Lamp Spacing 4" O.C.	CZ14 = 120v-277v, 14W 1640lm CZ20 = 120v-277v, 20W 2265lm C1 = 0-10V dimming, 1%, 120-277v C2 = TRIAC/ELV 2-wire, 3% 120v (Lead/Trail Edge) E1 = EldoLED 0-10V Logarith.Dim, 0.1%, 120-277v E2 = EldoLED DALI, 0.1%, 120-277v E3 = EldoLED 0-10V Linear Dim, 0.1%, 120-277v L2 = Lutron Hi-lume 1% 2-wr LED driver (120v fwd phase) L3 = Lutron Hi-lume 1% 3-wire/EcoSystem, 120-277v LTB = Lutron Hi-lume 1% EcoSystem LED driver, 1%, 120-277v, Soft-on, Fade-to-Black	4 = 4" 6 = 6" 9 = 9" 12 = 12" or custom spacing	P14 = White BLK =Black PA = Clear Aluminum PXX = SLI Color CST = Custom	79A = Veiling Acrylic 82A = Frosted Supertex

Cove must be vented to ensure proper performance and maximize driver life.