

Multi-lamp, solid state light engine, pendant mounted general linear system with flangeless housing, nominal 3" (80mm) wide aperture. Narrow profile lighting system used in low to medium ceiling heights to illuminate as general lighting. Illuminates both upward and downward.

**SPECIFICATIONS**

**HOUSING**

- Extruded aluminum with seamless welded and ground end plates

**MOUNTING**

- Pendant

**ELECTRICAL**

- Integral dimmable electronic driver with internal short circuit protection
- 120v-277v primary, compatible with 0-10v dimmers
- Also available for 120v phase control

**LAMP**

- 8 watt LED 1100lm/ft supplied with fixture

**SOCKET**

- Circuit board mounted to extruded aluminum heatsink
- Inline connectors allow removal and replacement

**TRIM**

- Regress trim integral to housing

**FINISH**

- Powder paint on all surfaces in black and white as standard
- Additional colors and RAL palette available
- Custom finishes available

**LABELS**

-  US, US tested to UL standards 1598, Damp location


**JOB:** \_\_\_\_\_

**SPECIFIER:** \_\_\_\_\_

**TYPE:** \_\_\_\_\_

**QUANTITY:** \_\_\_\_\_

**SIGNATURE:** \_\_\_\_\_

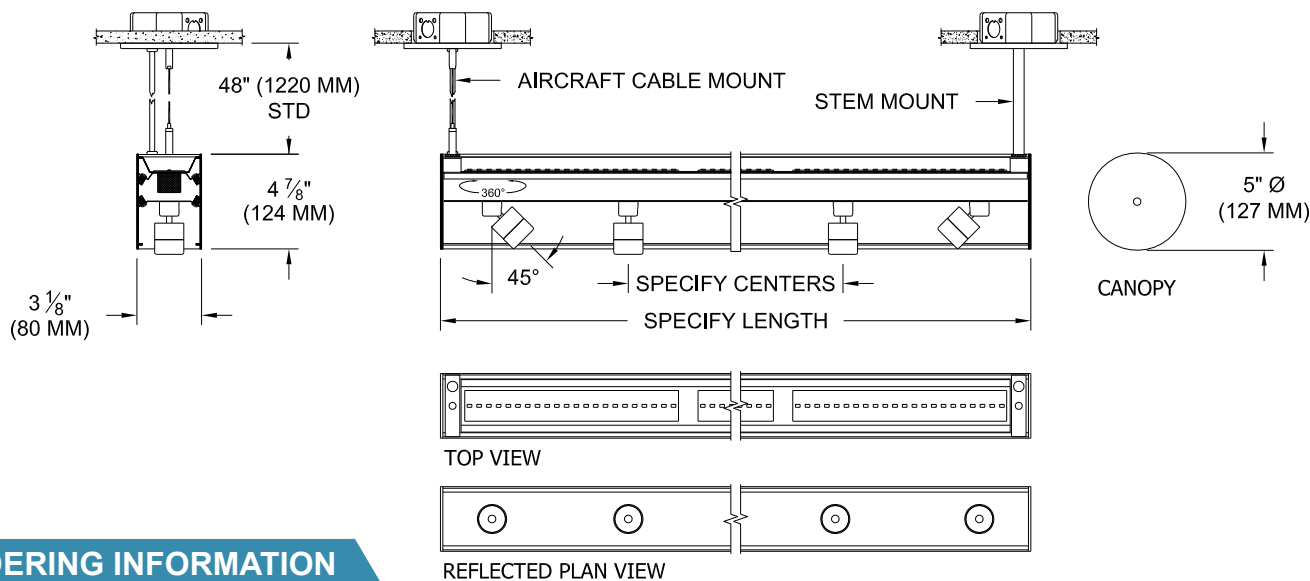

**ORDERING INFORMATION**

840-LED	LENGTH	DRIVER	CIRCUIT	FINISH	MOUNTING / LENGTH
					/
Surface Housing Up/Down Pendant Mt. 8 = 80 CRI 27 = 2700K 30 = 3000K 35 = 3500K	Specify exact length in increments of 12" (300 mm) Min. 2' required for integral driver	UN3 = 120v-277v HE 0-10v Dim. UN5 = 120v-277v HO 0-10v Dim. 123LT2 = 120v HE Lutron 2 wire 125LT2 = 120v HO Lutron 2 wire 123LT3 = 120-277v Lutron 3 wire 125LT3 = 120-277v Lutron 3 wire	1C = 1 Circuit 2C = 2 Circuit	P14 = White BLK=Black PXX = SLI Color XXXX = RAL # CST = Custom	CM = Cable 12" SM = Stem 24" 36" 48" 60"



Patent Pending.  
These specifications subject to change without notice.

[www.specialtylightingindustries.com](http://www.specialtylightingindustries.com)  
1306 Doris Avenue, Ocean, NJ 07712 USA  
800.462.7812 732.517.0800 FAX:732.517.0971