

Multi-lamp, solid state light engine, general lighting housing, nominal 3" (80mm) wide aperture and acrylic lens. Narrow profile lighting system used in low to medium ceiling heights to illuminate as general lighting.

**SPECIFICATIONS**

**HOUSING**

- Extruded aluminum with seamless welded and ground end plates

**MOUNTING**

- Pendant

**ELECTRICAL**

- Integral dimmable electronic driver with internal short circuit protection
- 120v-277v primary, compatible with 0-10v dimmers
- Also available for 120v phase control

**LAMP**

- 8 watt LED 1100lm/ft supplied with fixture

**SOCKET**

- Circuit board mounted to extruded aluminum heatsink
- Inline connectors allow removal and replacement


**LENS**

- Acrylic diffusing lens
- Others available consult factory

**FINISH**

- Custom finishes available

**LABELS**

-  , US tested to UL standards 1598, Damp location


**JOB:** \_\_\_\_\_

**SPECIFIER:** \_\_\_\_\_

**TYPE:** \_\_\_\_\_

**QUANTITY:** \_\_\_\_\_

**SIGNATURE:** \_\_\_\_\_

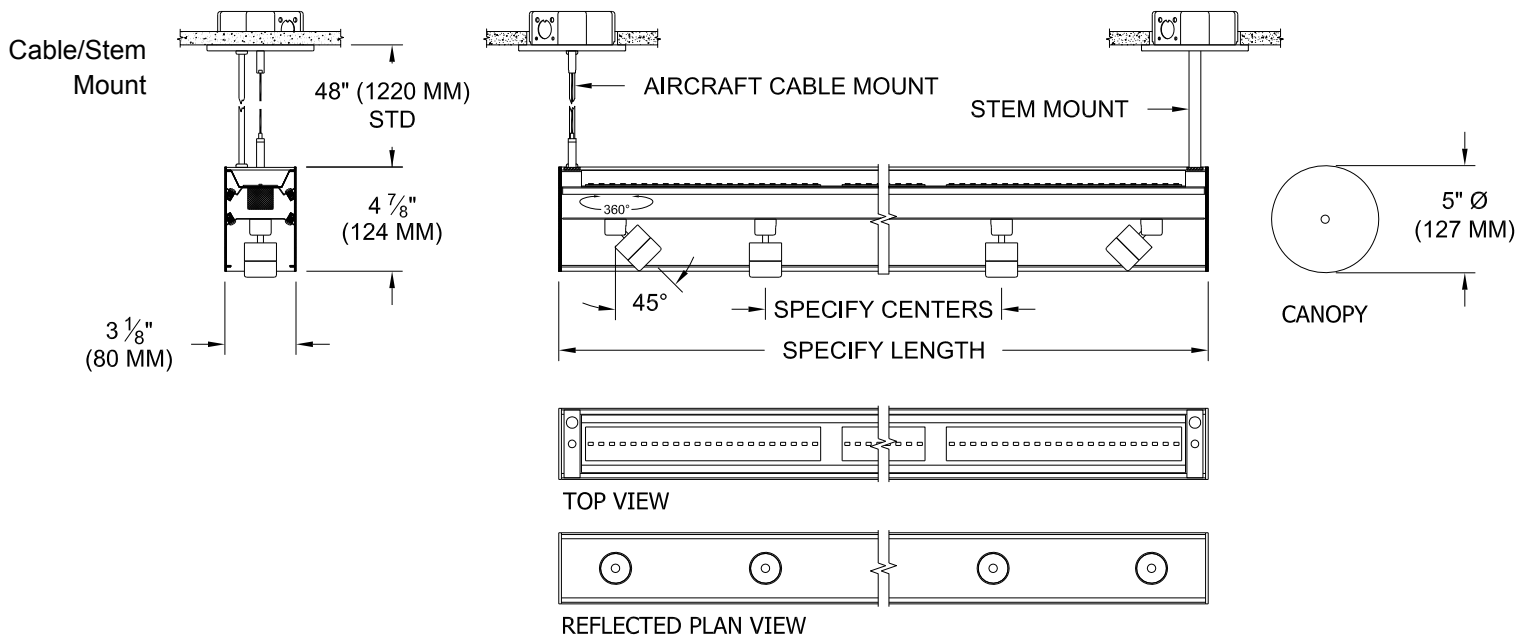


**Refer to page 2 for Ordering Information and lighting configurations**

ORDERING INFORMATION

870-LED Accent	CONFIGURATION*	DRIVER	BEAMSPREAD	APERTURE LENS	
<b>8</b> = 80 CRI <b>27</b> = 2700K <b>9</b> = 90 CRI <b>30</b> = 3000K <b>35</b> = 3500K <b>40</b> = 4000K	<b>E4T</b> = 4'- 2 end lamps <b>E4F</b> = 4'- 4 end lamps <b>E8T</b> = 8'- 2 end lamps <b>E8F</b> = 8'- 4 end lamps <b>E8S</b> = 8'- 6 end lamps <b>EM8T</b> = 8'- 3 lamps <b>EM8F</b> = 8'- 6 lamps <b>EMS</b> = 8'- 9 lamps <b>CST</b> = Custom See Lamp Configuration chart below*	<b>S1</b> =0-10V dimming, 1%, 120-277v <b>T1</b> =TRIAC/ELV 2-wire, 3% 120v (Lead/Trail Edge) <b>E1</b> =EldoLED 0-10V Logarithmic Dim, 0.1%, 120-277v <b>E2</b> =EldoLED DALI, 0.1%, 120-277v <b>E3</b> =EldoLED 0-10V Linear Dim, 0.1%, 120-277v <b>L2</b> =Ltrn Hi-lume 1% 2-wr LED driver (120v fwd phase) <b>L3</b> =Ltrn Hi-lume 1% 3-wire/EcoSystem, 120-277v <b>LTB</b> =Lutron Hi-lume 1% EcoSys LED driver, 1%, 120-277v, Soft-on, Fade-to-Black	<b>10</b> = 10 Degrees <b>20</b> = 20 Degrees <b>30</b> = 30 Degrees	<b>97A</b> = Hexcell	
870-LED Linear	DRIVER	CIRCUITS	FINISH	APERTURE LENS	MOUNTING / LENGTH
<b>8</b> = 80 CRI <b>27</b> = 2700K <b>9</b> = 90 CRI <b>30</b> = 3000K <b>35</b> = 3500K <b>40</b> = 4000K	<b>S1</b> =0-10V dimming, 1%, 120-277v <b>T1</b> =TRIAC/ELV 2-wire, 3% 120v (Lead/Trail Edge) <b>E1</b> =EldoLED 0-10V Logar. Dim, 0.1%, 120-277v <b>E2</b> =EldoLED DALI, 0.1%, 120-277v <b>E3</b> =EldoLED 0-10V Linear Dim, 0.1%, 120-277v <b>L2</b> =Ltrn Hi-lume 1% 2-wr LED driver (120v fwd phase) <b>L3</b> =Ltrn Hi-lume 1% 3-wire/EcoSystem, 120-277v <b>LTB</b> =Lutron Hi-lume 1% EcoSys LED driver, 1%, 120-277v, Soft-on, Fade-to-Black	<b>1C</b> = 1 Circuit* <b>2C</b> = 2 Circuit* *for Entire Fixture	<b>P03</b> = Aluminum Paint <b>P14</b> = White <b>BLK</b> =Black <b>PXX</b> = SLI Color <b>XXXX</b> = RAL # <b>CST</b> = Custom	<b>79A</b> = Veiling Acrylic <b>91A</b> = Solite	<b>CM</b> = Cable 12" <b>SM</b> = Stem 24" 36" 48" * *Standard length <b>RC</b> = Recessed <b>SH</b> = Surface

CONFIGURATIONS - LINEAR AND ACCENT

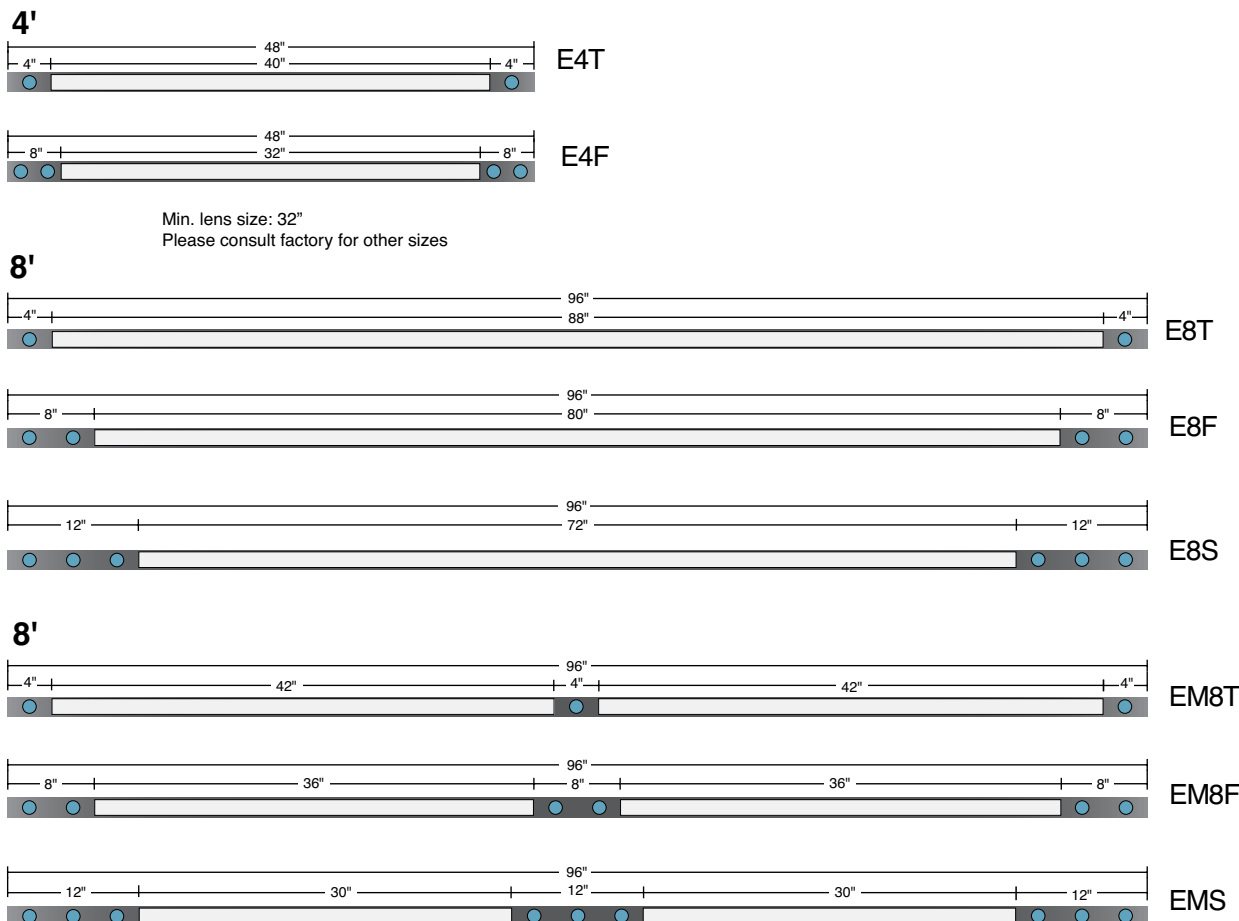

Patent Pending.  
These specifications subject to change without notice.

[www.specialtylightingindustries.com](http://www.specialtylightingindustries.com)  
 1306 Doris Avenue, Ocean, NJ 07712 USA  
 800.462.7812 732.517.0800 FAX:732.517.0971