

Multi-lamp, solid state light engine, adjustable recessed linear wall grazer with plaster housing. Narrow profile wall grazer used in medium ceiling heights to highlight the texture in surfaces such as stucco or brick, illuminate flat surfaces such as venetian plaster, fabric, wood, or general lighting

SPECIFICATIONS

HOUSING

- Aluminum housing with flangeless trim and integrated screed edge

MOUNTING

- Install from below in sheetrock ceiling

ELECTRICAL

- Integral electronic dimmable driver
- 5H Cell configuration require Remote driver
- 1,699 maximum lumens available

LAMP

- (10), 80 CRI, 3000K Standard LED - supplied with fixture
- Consult factory for additional options

SOCKET

- Circuit board mounted to extruded aluminum heatsink

LENS

- Acrylic diffusing lens as standard, narrow and wide beam optics available as standard
- Consult factory for custom options


TRIM

- Flangeless


FINISH

- Paint on all surfaces in black and white as standard
- Additional colors and RAL palette available
- Consult factory for custom finishes


LABELS

-  , US tested to UL standards 1598, Damp location, IC Rated

JOB: _____
 SPECIFIER: _____
 TYPE: _____
 QUANTITY: _____
 SIGNATURE: _____






Shown is 5H

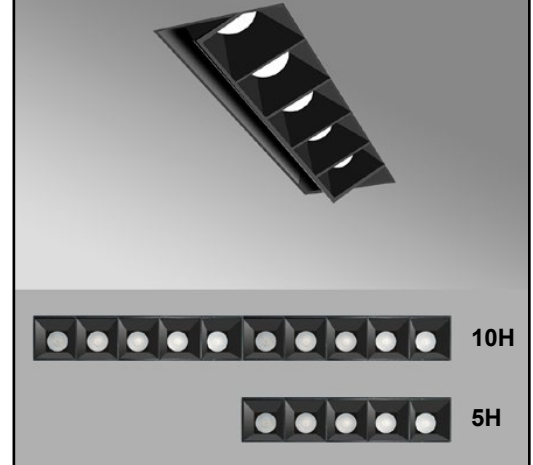

OUTPUT CHART *

WIDE (WD)	NARROW (NW)
1306 Lm	1724 Lm
24 w	24 w

*Based on 10H Configuration

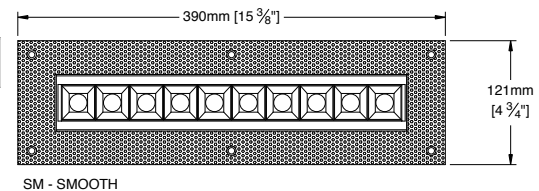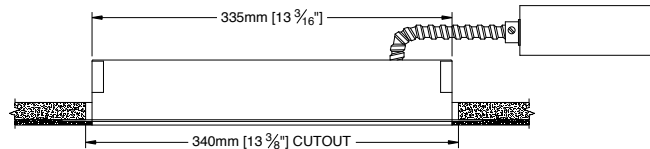

ORDERING INFORMATION

899-LED-PH	CELLS	VOLTAGE	DRIVER	LOUVER	OPTIC	APERTURE LENS
SM						
BAFFLE TYPE SM = Smooth	5H* 10H 15H CST *Requires Remote Driver	120 220/240 277 UNV = 120-277	2D = No Dimming 3D = TRIAC /ELV** 4D = 0-10v Dimming RX = remote **120V Only *Consult factory for additional options	WHT =White BLK =Black CST =Custom	NW = Narrow WD = Wide	79A = Veiling Acrylic



Patent Pending.
 These specifications subject to change without notice.

www.specialtylightingindustries.com
 1306 Doris Avenue, Ocean, NJ 07712 USA
 800.462.7812 732.517.0800 FAX:732.517.0971

03/18