

# NARROW APERTURE LINEAR ADJUSTABLE SYSTEM

■ 840 LED ■ 850 LED

Multi lamp, solid state light engine recessed linear system with nominal 3" aperture. Narrow profile lighting system used in low to medium ceiling heights to illuminate general lighting.

## SPECIFICATIONS

### HOUSING

- Extruded aluminum with seamless welded and ground end plates

### MOUNTING

- Pendant mounting

### ELECTRICAL

- Integral dimmable electronic driver with internal short circuit protection
- 120v-277v primary, compatible with 0-10v dimmers
- Also available for phase control

### LAMP

- Available in 2700, 3000 and 3500K
- 1 watt per adjustable head available in 3000K

### SOCKET

- Circuit board mounted to extruded aluminum heatsink
- Inline connectors allow removal and replacement

### LENS

- Satin acrylic lens. Optional color lenses available (850 LED Only)
- Regress trim integral to housing (850 LED Only)

### FINISH


- Powder paint on all surfaces, white as standard
- Additional colors and RAL palette available
- Polished/Satin Aluminum available
- Consult factory for custom finishes

### LABELS

- CSA-C,US, Damp location




## 840 LED

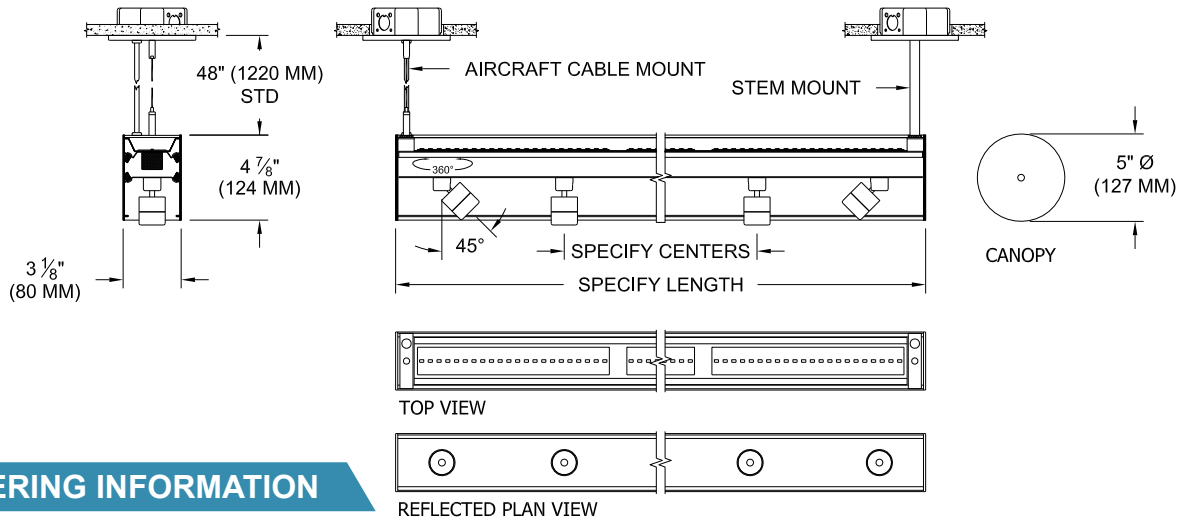

### ORDERING INFORMATION

HOUSING	LENGTH	LAMP SPACING	DRIVER	CIRCUIT	FINISH	MOUNTING/LENGTH
<b>840-LED-</b>						/
Surface Housing 8 = 80CRI    27 = 2700K 9 = 90CRI    30 = 3000K 35 = 3500K	Specify exact length	Specify exact on center spacing	<b>UN3</b> =120v-277v HE 0-10v, 5W, 650lm <b>UN5</b> =120v-277v HO 0-10v, 7W, 950lm *ADD 2W FOR 2WIRE	<b>1C</b> = 1 Circuit <b>2C</b> = 2 Circuit	<b>WHT</b> = White <b>SA</b> = Satin Aluminum <b>PA</b> = Polished Aluminum <b>XXXX</b> = RAL # <b>CST</b> = Custom	<b>CM</b> = Cable    12" <b>SM</b> = Stem      24" 36" *standard *48" 60"

## 850 LED

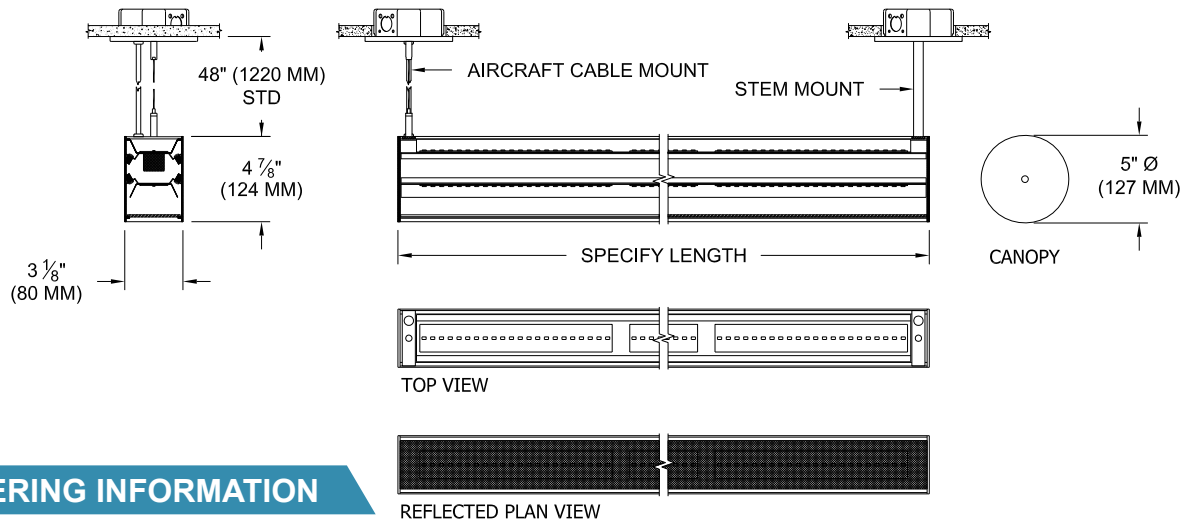

### ORDERING INFORMATION

HOUSING	LENGTH	DRIVER	CIRCUIT	FINISH	MOUNTING/LENGTH
<b>850-LED-</b>					/
Surface Housing 8 = 80CRI    27 = 2700K 9 = 90CRI    30 = 3000K 35 = 3500K	Specify exact length	<b>UN3</b> =120v-277v HE 0-10v, 5W, 650lm <b>UN5</b> =120v-277v HO 0-10v, 7W, 950lm *ADD 2W FOR 2WIRE	<b>1C</b> = 1 Circuit <b>2C</b> = 2 Circuit	<b>WHT</b> = White <b>SA</b> = Satin Aluminum <b>PA</b> = Polished Aluminum <b>XXXX</b> = RAL # <b>CST</b> = Custom	<b>CM</b> = Cable    12" <b>SM</b> = Stem      24" 36" *standard *48" 60"