

Instruction Sheet for 824-LED-SH New Install for Surface Housing- Adding New Sections




It is recommended these products be installed by a qualified electrician.

Note: This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product hazards involved



Step 1- Remove wingnuts to access the wiring in housing. Hole above is access for mounting screw which holds each section to ceiling.

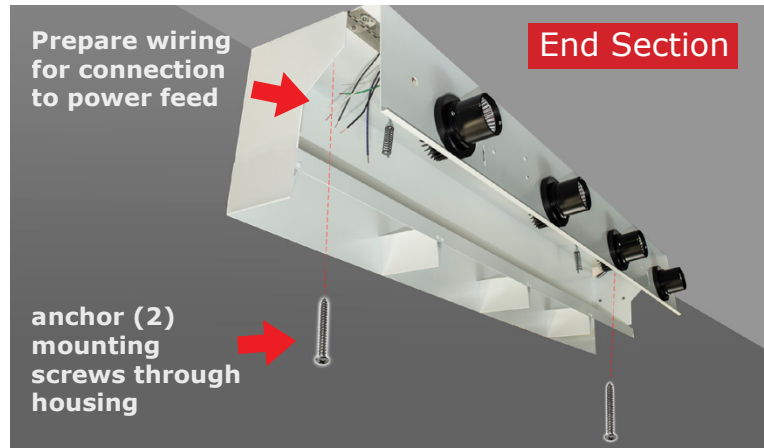


Step 2A- Anchor section to ceiling with (2) mounting screws. **DO NOT** forget to use proper support above ceiling to anchor mounting screws and sections into ceiling.

Step 2B- Connect wiring to external power feed. Send wiring through knockouts at top of housing and approved conduit connector as per your local electrical codes.



Step 3- Remove screw holding spacer. If spacer is not removed, section will not clip into existing section in ceiling. Repeat this step when installing new section.

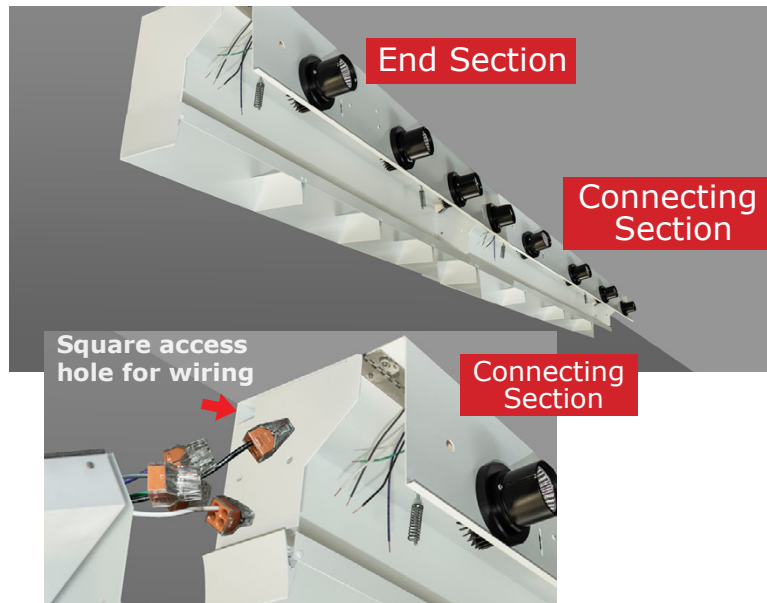

Step 4- Connect wiring of newly installed section with existing section. Position and clip new section into existing section. Make sure to use mounting screws to secure each section to ceiling



Step 5- After section has been wired and aligned with other section, use included hardware to lock the sections together.



Step 6- After new section is aligned with existing section, insert screw into baffle hole.



Step 7- Test power for lamp illumination. Repeat steps 1-6 to add more sections. When finished with all sections, insert lens.