# REGRESSED SQUARE APERTURE ADJUSTABLE ACCENT LIGHT

Multi-lamp, solid state light engine, recessed accent light, nominal 4" square trim with 2" (50mm) aperture and optional glass diffuser. Accent and downlighting in low to medium ceiling heights typically found in residential, commercial and retail applications. Suitable for new or existing construction in sheetrock ceilings.

# **SPECIFICATIONS**

## **HOUSING**

- · Precision die-formed heavy gauge aluminum
- ⇔ Airtight construction suitable for direct contact with insulation

### **MOUNTING**

· Install from below in sheetrock ceiling

## **ELECTRICAL**

• Integral dimmable electronic driver with internal short circuit protection

### **LAMP**

• (2) Citizen LEDs supplied with fixture

### SOCKET

· Precision aluminum yoke with CNC machined lampholder assembly

#### LENS

- · Interchangeable reflector provides multiple beam patterns
- · Optional borosilicate lenses available for aperture

### TRIM


- · Flanged or flangeless, one piece die-cast aluminum pyramidal shield
- · ST is flanged trim fully sealed and gasketed. Aperture lens required


## **FINISH**


- · Black powder paint housing
- · Aperture trim available in black and white as standard
- · Solid wood, additional colors, RAL palette, custom finishes available


#### LABELS

• 1598, Damp location, Wet with ST trim, IC/Airtight

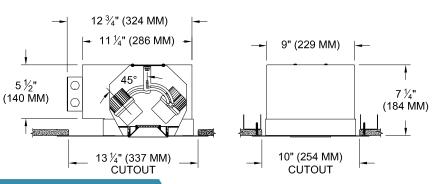

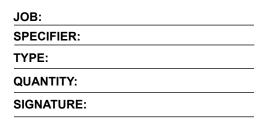

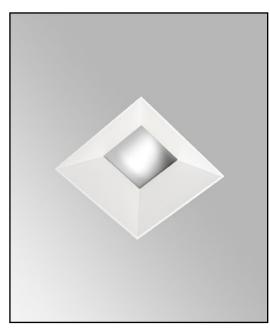



# ORDERING INFORMATION

1009M-2LEDZ-APH	TRIM	SOURCE / DRIVER	BEAMSPREAD	TRIM FINISH	APERTURE LENS
		CZ14 /			
Airtight Plaster Housing	FT=Flanged Trim	<b>CZ14</b> =120-277v, 14W 1100lm	15 = 15 Degrees 24 = 24 Degrees 38 = 38 Degrees 60 = 60 Degrees	P14 = White BLK=Black PXX = SLI Color WXX = Wood XXXX = RAL # CST = Custom	Blank= None 90A = Clear 91A = Solite 92A = Supertex 93A = Frosted
9 = 90+CRI 27 = 2700K 30 = 3000K 35 = 3500K	ST=Shower Trim* ZT=Zero Trim	\$1 =0-10V dimming, 1%, 120-277v T1 =TRIAC/ELV 2-wire, 3% 120v (Lead/Trail Edge) E1 =EldoLED 0-10V Logarithmic Dim, 0.1%, 120-277v			
<b>40</b> = 4000K	*Aperture lens required	E2 =EldoLED DALI, 0.1 <sup>o</sup> , 120-277v E3 =EldoLED 0-10V Linear Dim, 0.1%, 120-277v L2 =Ltrn Hi-lume 1% 2-wr LED driver (120v fwrd phase) L3 =Lutron Hi-lume 1% 3-wire/EcoSystem, 120-277v LTB =Lutron Hi-lume 1% EcoSys LED driver, 1%, 120-277v, Soft-on, Fade-to-Black			

SpecialtyLighting INDUSTRIES

Lutron Only- 2 circuit box required / Request separate cutsheet

Patent Pending. These specifications subject to change without notice.